

Guidelines for Measuring

Ordering the correct size enclosure is the first step to a proper installation. The drawings on the following pages are designed to help you provide us with this information.

The final page can be used to hand draw any custom applications. Included below are helpful tips and recommendations for obtaining the needed measurements.

Please take a moment to review. We can never have too much information regarding your application.

"Proper Preparation Prevents Poor Performance", Author Unknown.

Custom Application Measuring

- A. Centerline dimension of the threshold:
- B. Height of the buttress (if applicable):
- C. Centerline dimensions of the return panel(s):
- D. Maximum height the application will accept:
- E. Notch width (if applicable):
- F. Degree of angle(s) on any return panel(s):
- G. Indicate what height unit you prefer:______ (Check current price list for standard heights.)

Note: Indicate on drawing where door and panel(s) are located and where showerhead is positioned. Also, please indicate any out of plumb/level conditions.


Measuring Tools


- 6' Level 4' Level 2' Level Tape Measure Pencil
- Marking Tape Protractor Basco Measuring Sheet

Checklist for Measuring


- $\sqrt{}$ Measuring must be done <u>after</u> finished wall material is in place.
- $\sqrt{}$ Measure each width or centerline (middle of threshold) as demonstrated by arrowed lines. Remember to allow for the body of the measuring tape.
- $\sqrt{}$ Measure maximum height available from top of tub deck or threshold to top of tile or fiberglass walls This measurement will assist your distributor in selecting the most appropriate standard height from Basco's Distributor Price List. Custom heights are also available. Steam tight units are designed to fill the entire opening.
- $\sqrt{}$ Check all surfaces (including top of buttress if applicable) and walls for level. If any surface is out of level 3/8" or more, a tapered filler* is recommended. Please indicate on drawing where out of level conditions exist.
- $\sqrt{}$ Indicate showerhead position on drawing with an "X".


*Your distributor can provide part numbers and pricing for fillers from Basco's Parts Price List.

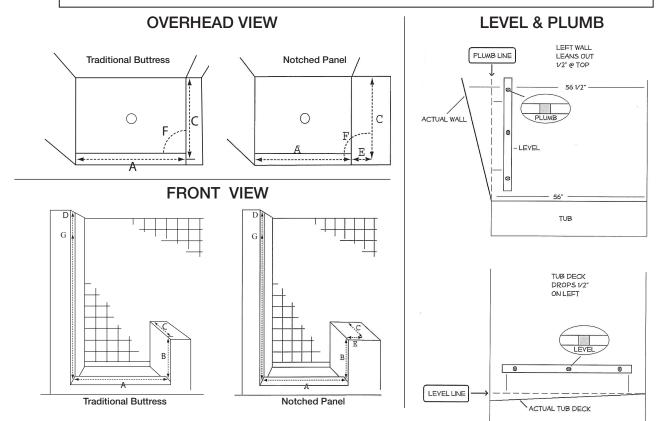



Neo-Angle or 90° Corner Shower Door

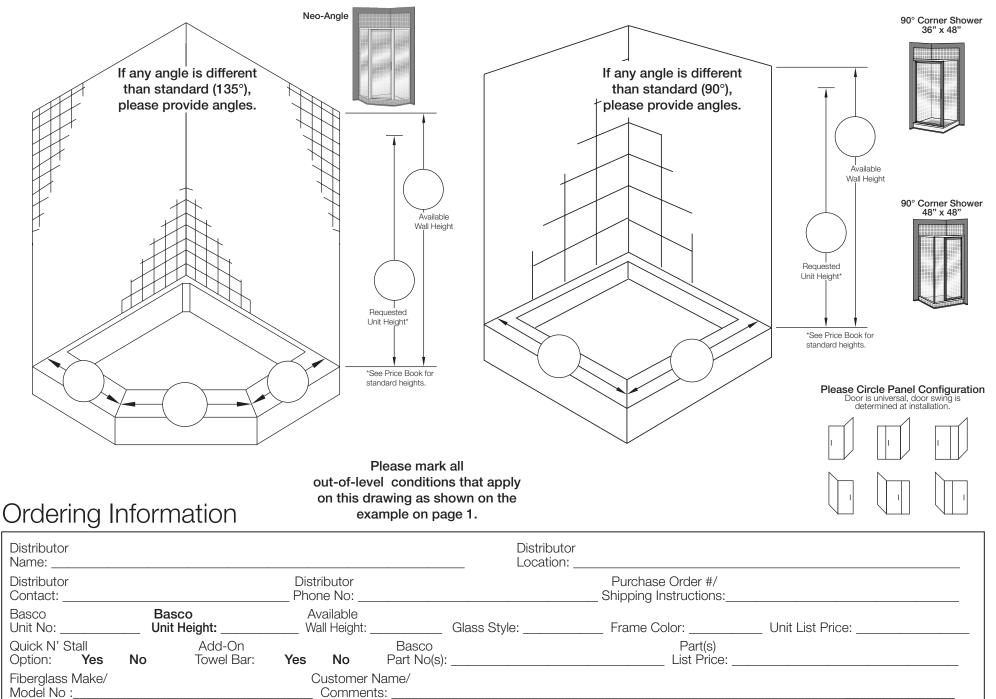

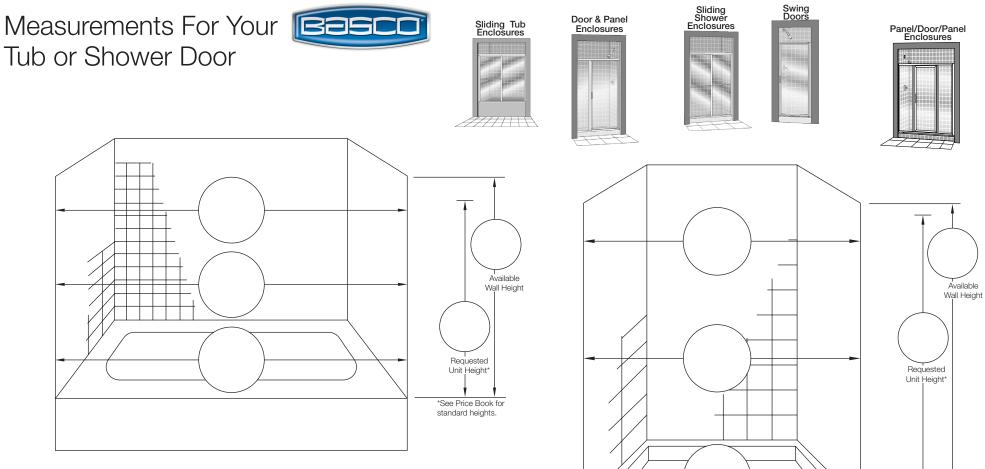

Most fiberglass units have a radius where the tub deck/ threashold surface and wall meet. Please measure the bottom width approximately 1" above the tub deck/ threshold surface.

Please mark all out-of-level conditions that apply on this drawing as shown on the example on page 1.

Ordering Information

Distributor Name:						Distributor		
Distributor Contact:				ributor ne No:			Purchase Order #/ Shipping Instructions:	
Basco Unit No:		sco t Height:		/ailable all Height: _		Glass Style:	Frame Color:	_ Unit List Price:
Quick N' Stall Option: Yes	No	Add-On Towel Bar:	Yes	No	Basco Part No(s):		Part(s) List Price:	
Fiberglass Make/ Model No :				ustomer N Comment				

*See Price Book for

standard heights.

	Basco D	esign Your Basco C	Custom Tub or	[·] Shower	
Front View:		<u>100</u>	View:		
		Please mark all out-of-level			
		conditions that apply on this			
Ordering Inform	ation	drawing as shown on the example on page 1.			
Distributor		Distributor			
Name:		Location:			
Distributor Contact:	Distributor Phone No:		Purchase Order #/ Shipping Instructions:		
Basco Basc		: Glass Style:			
Quick N' Stall	Add-On	Basco	Part(s)		
Option: Yes No Fiberglass Make/	Towel Bar: Yes No Customer	Part No(s):	List Price:		
Model No :	Customer				